
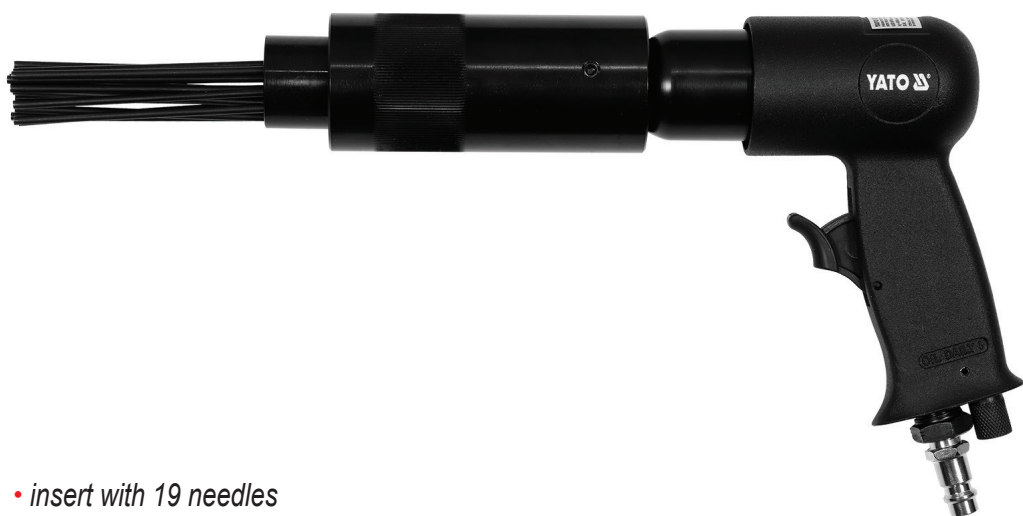


Pneumatic needle hammer

YT-09910

Pneumatic needle hammer supplied with compressed air stream. Designed for removal of, among others: scale, fluxing agent, boiler scale, rust, paint out of steel structures in panel and paint shops, automotive service workshops, manufacturing facilities and in DIY applications.



- insert with 19 needles
- pressure: 0.63 MPa
- capacity: 113 l/min
- percussion frequency: 4500 strokes/min caters for rapid work progress
- adjustment of stroke rate per minute
- provides for the possibility of uneven surfaces treatment
- standard connection